

# TEST REPORT

## REACTION TO FIRE TEST

### Test Sponsor:

VOX FURNITURE TRADING LLC/GREENRANCHES

DUBAI FESTIVAL PLAZA

Dubai, United Arab Emirates

T: +971 50 8335751

Website: [www.voxfurniture.ae](http://www.voxfurniture.ae)

### Test Material / Assembly:

Interior and Exterior Ceiling and Wall Panel (Fronto/Infratop soffits) – 1mm thick, wooden-print finished

### Test Standard:

ASTM E84 – 22: Standard Test Method for Surface Burning Characteristics of Building Materials



**THOMAS BELL-WRIGHT  
INTERNATIONAL CONSULTANTS**

Test Date: 18-May-23

Issue Date: 20-Jun-23

Test Reference No: XD003-1

PO BOX 26385, DUBAI UAE

T +971 (0)4 821 5777

[fire@bell-wright.com](mailto:fire@bell-wright.com)

[www.bell-wright.com](http://www.bell-wright.com)

DUBAI

DOHA

RIYADH



## Accreditation

### Testing

ISO/IEC 17025: General requirements for the competence of testing and calibration laboratories with:

United Kingdom Accreditation Service (UKAS) - Testing Laboratory: **4439**  
[www.ukas.com](http://www.ukas.com)



GCC Accreditation Center (GAC) – Testing Laboratory: **ATL-0017**  
[www.GCC-accreditation.org](http://www.GCC-accreditation.org)



## Memberships

Members of European Group of Organization for Fire Testing, Inspection and Certification

[www.egolf.org.uk](http://www.egolf.org.uk)

Member of Association for Specialist Fire Protection

[www.asfp.org.uk](http://www.asfp.org.uk)

Member of Centre for Window and Cladding Technology

[www.cwct.co.uk](http://www.cwct.co.uk)



The work which is the subject of this report falls under the accreditations of **ISO 17025 UKAS** and **ISO 17025 GAC**.



## Table of Contents

1. INTRODUCTION .....	4
2. SPONSOR.....	4
3. TESTING LABORATORY .....	4
4. DATE OF TEST .....	4
5. SPECIMEN DESCRIPTION .....	5
6. SPECIMEN VERIFICATION .....	5
7. METHOD OF TEST.....	5
7.1. Placing of test specimen .....	5
7.2. Test Method.....	6
7.3. Conditioning.....	6
8. OBSERVATION .....	6
9. SUMMARY OF RESULTS.....	7
10. CLASSIFICATIONS .....	7
11. LIMITATIONS .....	8
12. APPENDIX 1 – GRAPHS.....	9
13. APPENDIX 2 – PICTURES.....	10



## 1. INTRODUCTION

Determination of the flame spread index and the smoke developed index of Interior and Exterior Ceiling and Wall Panel (Infrotop soffits) – 1mm thick, wooden-print finished as per ASTM E84 – 22; Standard Test Method for Surface Burning Characteristics of Building Materials.

## 2. SPONSOR

Name: VOX FURNITURE TRADING LLC  
Address: FESTIVAL PLAZA  
DUBAI, United Arab Emirates  
T: +971 50 8335751 Website:  
www.voxfurniture.ae

## 3. TESTING LABORATORY

Name: Thomas Bell-Wright International Consultants (TBWIC)  
Address: Corner of 46<sup>th</sup> and 47<sup>th</sup> streets, Jebel Ali Industrial Area 1  
P.O. Box 26385, Dubai, U.A.E.  
T: +971 (0) 4 821 5777  
www.bell-wright.com

## 4. DATE OF TEST

Sample received date: 5-May-23  
Test date: 18-May-23

The test had been witnessed by:

Name	Company	Contact Number
Prashant	VOX FURNITURE TRADING L.L.C	+971 50 8335751



## 5. SPECIMEN DESCRIPTION

*Note: The testing laboratory does not hold any responsibility for the information that has been provided by the test sponsor which could not be verified by the testing laboratory, as this could affect the validity of the test result. All information that could not be verified will be indicated by an asterisk (\*) mark.*

<b>Product Tested</b>	Interior and Exterior Ceiling and Wall Panel (Infrotop soffits) – 1mm thick, wooden-print finished *
<b>Product Name</b>	Infrotop*
<b>Product Description</b>	Manufactured using the co-extrusion method. * Made from polyvinyl chloride with additives. * Moleted surface. * Panels with SVP, SVPU marking on the surface covered with paint. *
<b>Manufacturer</b>	PROFILE VOX Sp.z.o.o.sp.k. ul.Gdynska 143 62-004 Czerwonak, Poland *
<b>Thickness</b>	1.0 mm (measured by TBWIC)
<b>Area Weight</b>	1.97 kg/m <sup>2</sup> (measured by TBWIC)
<b>Density</b>	1967.59 kg/m <sup>2</sup> (measured by TBWIC)
<b>Quantity of panels</b>	3 Nos.
<b>Dimensions per panel</b>	2 panels: 2790 x 605 x 1mm (l x w x t) and 1 panel: 1920 x 605 x 1 mm (l x w x t) (measured by TBWIC)
<b>Total dimension</b>	7500 x 605 x 1 mm (l x w x t) (measured by TBWIC)
<b>Specimen placement</b>	The three (3) panels of Interior and Exterior Ceiling and Wall Panel (Infrotop soffits) – 1mm thick, wooden-print finished were butt jointed end-to-end. The test specimen was placed directly to the tunnel ledges with the fire side towards the flame source.
<b>Specimen preparation</b>	The sample has been prepared by the client. It was mounted in metals strips to support the specimen when placed in the tunnel.

## 6. SPECIMEN VERIFICATION

The choice and design and the definition of the specimen have been made by Green Ranches L.L.C, and TBWIC testing laboratory has not been involved in the selection or design of the specimen. The results apply to the samples as received.

*Note: There are contexts where information has been provided by the sponsor and verification of information has been done through either technical datasheet or other document submission, or as indicated directly by the sponsor. For this reason, materials have been tested in an as-received condition and TBWIC bears no liability for the legitimacy of the submitted information.*

## 7. METHOD OF TEST

### 7.1. Placing of test specimen

The test specimen consisted of three (3) panels Interior and Exterior Ceiling and Wall Panel (Infrotop soffits) – 1mm thick, wooden-print finished mounted in metal strips for support. The dimension of panels are 2 panels: 2790 x 605 x 1mm (l x w x t) and 1 panel: 1920 x 605 x 1 mm (l x w x t) and were butt jointed end-to-end. The total dimension of the specimen was 7500 x 605 x 1 mm (l x w x t).



Several sections of cement board butt jointed end-to-end with overall dimensions of 7350 x 600mm (l x w), were placed at the back of the sample to protect the furnace lid assembly.

### 7.2. Test Method

The specimen was placed in the ceiling position, supported horizontally on the ledges of the Steiner Tunnel. The top surface (fire side) was exposed face down to the ignition source during the 10-minute test duration.

Flame Spread and Smoke Density were measured, and the results were compared against standard calibration materials (fiber-cement board, heptane and red oak flooring).

### 7.3. Conditioning

After delivery on 5-May-23 the specimen was placed in a conditioned space where temperature and humidity were maintained between  $23 \pm 2.8^\circ\text{C}$  and  $50 \pm 5\%$  respectively, until constant weight was attained.

Note: There were deviations observed in the temperature and relative humidity in 4 separate probes of thermo-hygrometer in our conditioning room, however the average values were within the limit.

## 8. OBSERVATION

### Test Data and Observation

Observations	Result
Ignition Time (min:sec)	0:18
Time to maximum flame front advance (min:sec)	1:33
Maximum flame spread (ft)	3.0
Time to end of tunnel reached (min:sec)	Not reached
Maximum temp recorded at the exposed thermocouple located near the end of the tunnel (°F / °C)	471 / 244
Melting and dripping	0:32
Flaming Droplets (min:sec)	None
Ignition on floor (min:sec)	1:15
Flaming on the floor (min:sec)	None
After flame on the top (min:sec)	None
After flame on the floor (min:sec)	None
Delamination (min:sec)	None
Shrinkage	None
FS*Time Area (ft*min)	26.35
Smoke Area (%A*min)	143.67
Heptane Smoke Area (%A*min)	84.6



## 9. SUMMARY OF RESULTS

The test specimen has been evaluated in accordance with ASTM E84 – 22; Standard Test Method for Surface Burning Characteristics of Building Materials.

The test results are:

<b>FLAME SPREAD INDEX (FSI)</b>	<b>15</b>
<b>SMOKE DEVELOPED INDEX (SDI)</b>	<b>170</b>

Results are valid for the tested configuration only.

## 10. CLASSIFICATIONS

The following information is designed to help put these test results into context. Flame Spread Index and Smoke Developed Index results from an ASTM E84 test are often used by regulatory agencies to approve materials for various applications. For example, the International Building Code 2021, Section 803.1.2 requires that:

Interior wall and ceiling finish materials shall be classified in accordance with ASTM E84 or UL 723-11th Ed. 2021. Such interior finish materials shall be grouped in the following classes in accordance with their flame spread and smoke-developed indices.

Class A: Flame spread index 0 - 25; smoke-developed index 0 - 450.

Class B: Flame spread index 26 - 75; smoke-developed index 0 - 450.

Class C: Flame spread index 76 - 200; smoke-developed index 0 - 450.

Note that the above example is the IBC requirement for interior wall and ceiling finishes only; the application of the tested specimen may differ.



### 11. LIMITATIONS

Testing of materials that melt, drip, or delaminate to such a degree that the continuity of the flame front is destroyed, results in low flame spread indices that do not relate directly to indices obtained by the testing materials that remain in place.

This report and all records of the test to which it relates may be not be retained by TBWIC further than 5 years from the date of testing.

This test report is respectfully submitted by: Thomas Bell-Wright International Consultants

Prepared by:

Jocelyn Cruz Jarabelo  
Fire Testing Engineer

Reviewed and Authorized by:


Suketa Tyagi  
Manager – Reaction to Fire




Report Revision Tracking		
Revision No.	Date Issued	Notes & Amendments
Rev. 00	20-Jun-23	This is the first issue of the report. No revisions are included.



## 12. APPENDIX 1 – GRAPHS

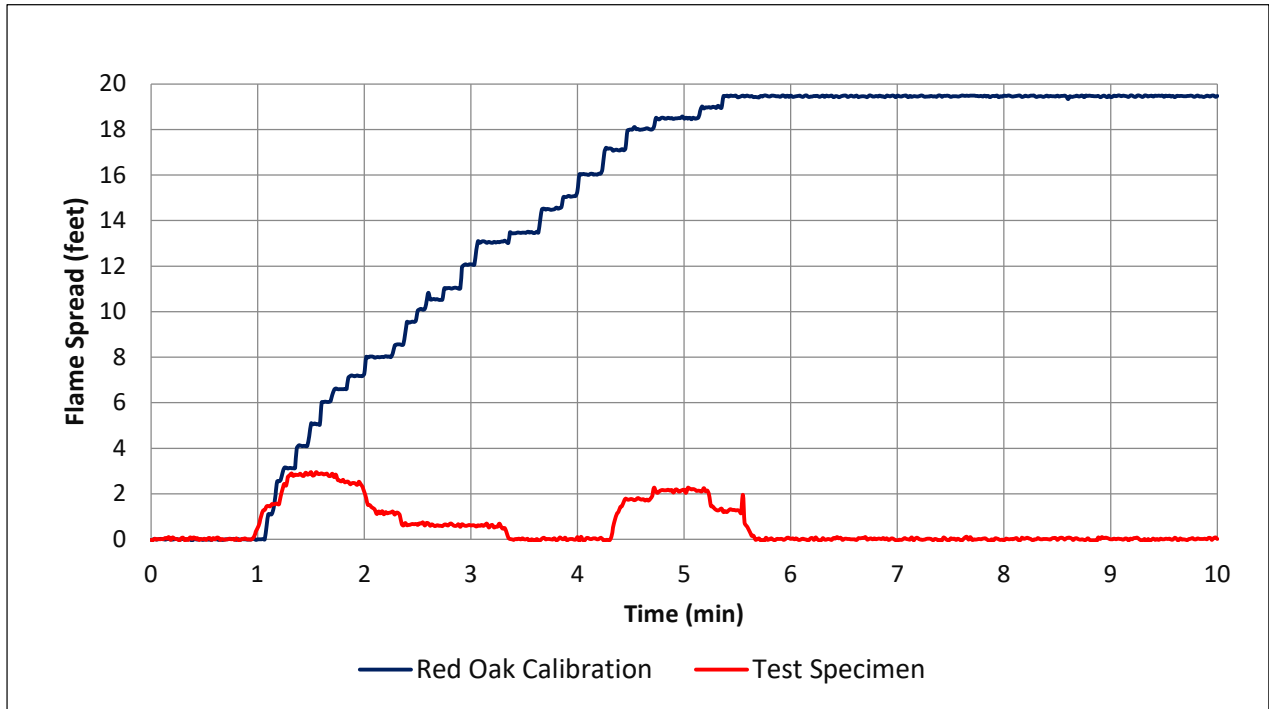

Graph 1: Flame Spread Index (FSI)

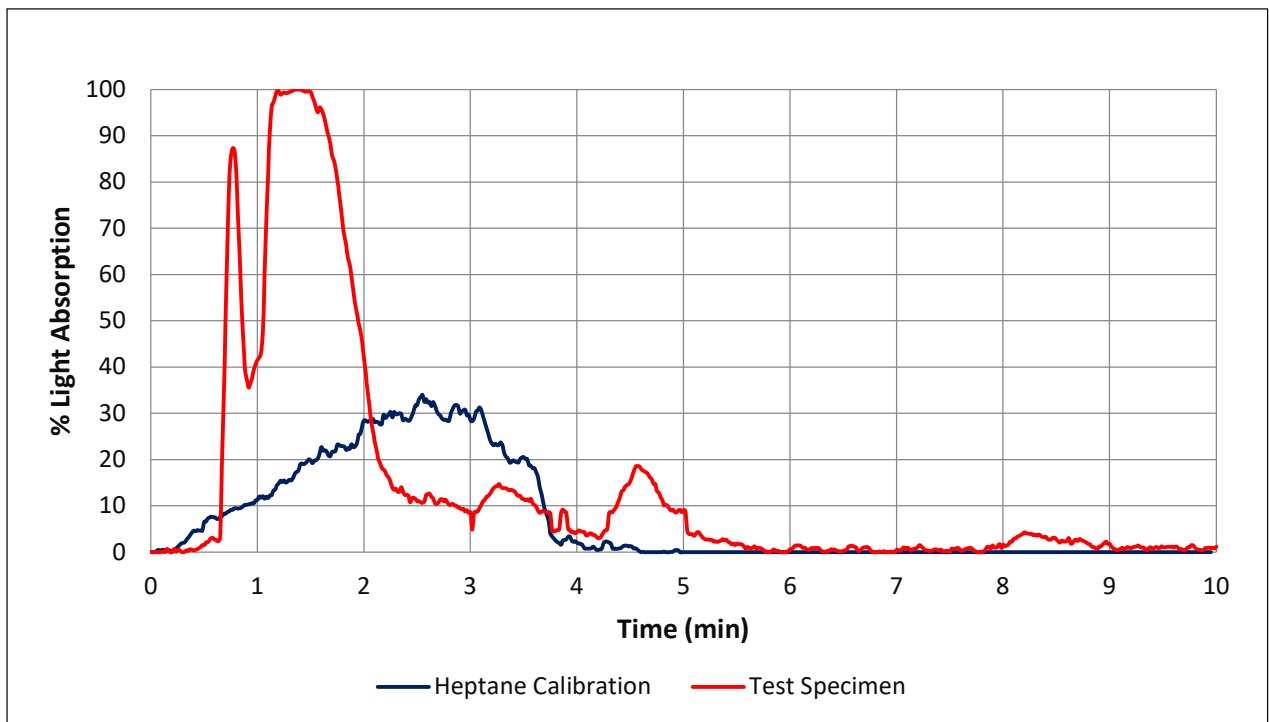

Graph 2: Smoke Developed Index (SDI)